

Branches & Nozzles

W2560 Series

Blue Devil Attack Nozzles

W2560 series

Nozzles: Constant Flow. Lightweight.
Improved Performance. Rugged Construction

Constant Flows:
Variable from 115 l.p.m. to 950 l.p.m. across the range.

Lightweight:
All major components in hard anodized aluminium.


Improved Performance:
The "Rylstatic" system is an alternative to fixed or spinning teeth that delivers reduced friction loss, improved throw and reduced maintenance. Most importantly, the increased efficiency of the RYLSTATIC system results in smaller droplet size with increased cooling effect whilst maintaining the effective reach in the FOG position.

Rugged Construction:
Heavy-duty design manufactured using hard anodized aluminium, tough rubber bumper and pistol grip with stainless steel internal springs and clips and incorporating the new RYLSTATIC system eliminating vulnerable spinning teeth.

Maximum w.p. 16 bar
Leak Test Pressure 25.5 bar



Blue Devil Nozzles are designed and manufactured to meet the requirements of:
NFPA 1964
UNE EN-15182 -1
UNE EN-15182 -2 Type 3

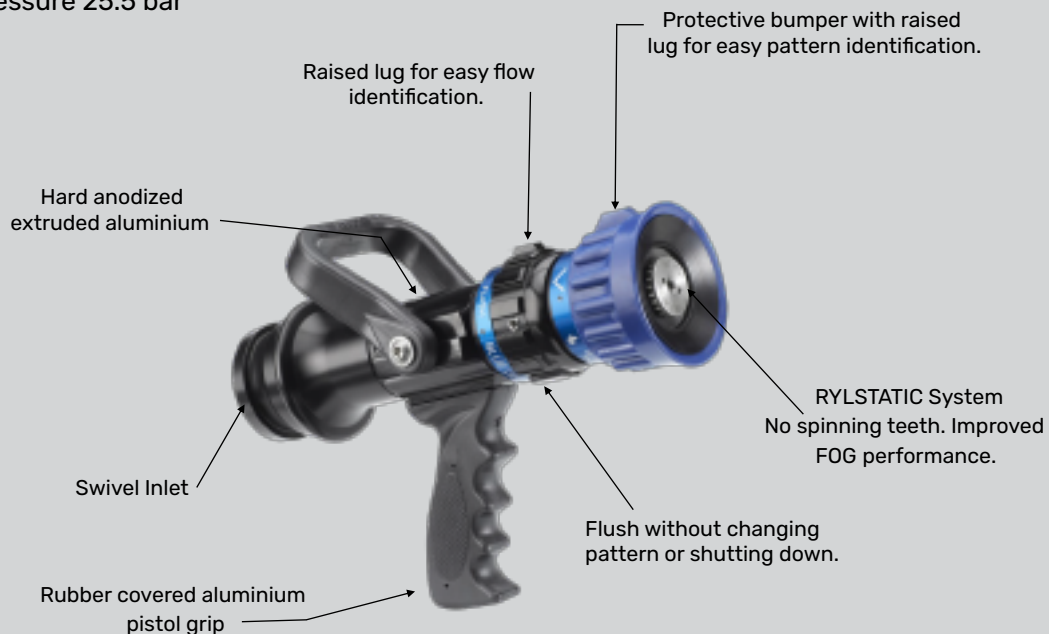

Fire Hosetech Limited,

Unit 1 Sowarth Field Industrial Estate, Settle, North Yorkshire, BD24 9AG
+44 (0)1729 825 999 | info@firehosetech.co.uk | www.firehosetech.co.uk