

WATERWAY

W2564 Series

W2564 series

Aquashield Nozzles

The Aquashield nozzle provides a flat fan or curtain of water to protect firefighters and equipment from radiant heat, smoke and flame. The lightweight, portable units are manufactured from aluminium and once placed on the ground, use the jet reaction of the discharge to hold the body in position.



When being used on major tank fires or similar, Aquashield units can be arranged to overlap one another forming a continuous shield against heat and smoke. This can be used particularly effectively to cool adjacent installations and prevent them becoming engaged in tank farm fires for instance.

Available with standard 2" BSP threaded inlets, the Aquashield is readily adaptable for use with any suitable coupling system.

Instantaneous inlets are fitted to the following Part No.'s:

W256403SUK - Aquashield 800

W256463SUK - Aquashield 1400

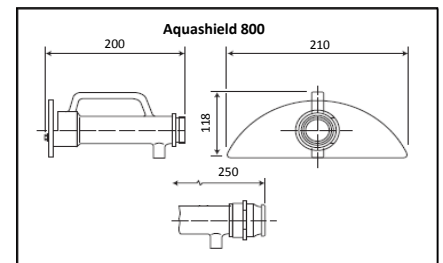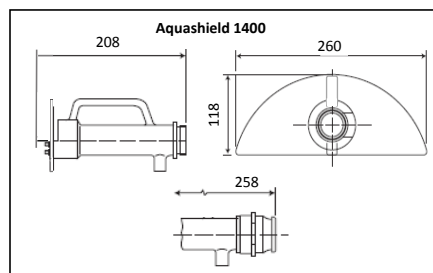

Model	Aquashield 800	Aquashield 1400
Standard Inlet	2" BSP male	2" BSP male
Weight – aluminium (kg)	1	1.2
Performance at 5 bar inlet		
Nominal Flow (l/min)	800	1400
Curtain Width (m)	24	26
Curtain Height (m)	6	7

Please note: All figures are approximate and will can vary significantly depending on operational conditions. Wind In particular can have a significant effect on curtain width and height.