

HEAVY DUTY SUCTION HOSE

Flexible PVC Heavy Duty Suction Hose H77

Flexible and lightweight, our heavy-duty suction hose offers minimum friction loss and maximum flow thanks to its smooth internal bore.

With good abrasion and chemical resistance allied to excellent pressure and vacuum rating, the hose is used by Utility companies, agricultural contractors and Fire and Rescue Services across the country.

Good crush and kink resistance give a robust product with a long service life.


Manufactured in the UK.

Available in a range of diameters, the most common sizes are 3", 4" and 5½" all of which are stocked at our workshops in Settle. Stock is held to manufacture 8ft (2.43m) and 10ft (3.05m) finished lengths as standard although up to 30m lengths can be supplied to special order.

Made to conform with JCDD/2 1975 requirements.

The BS336:2010 round thread suction couplings that we fit to our assemblies are all manufactured in the UK and in addition to hose guards for the coupling binding we can also fit binding protection if required.

HD Suction Hose

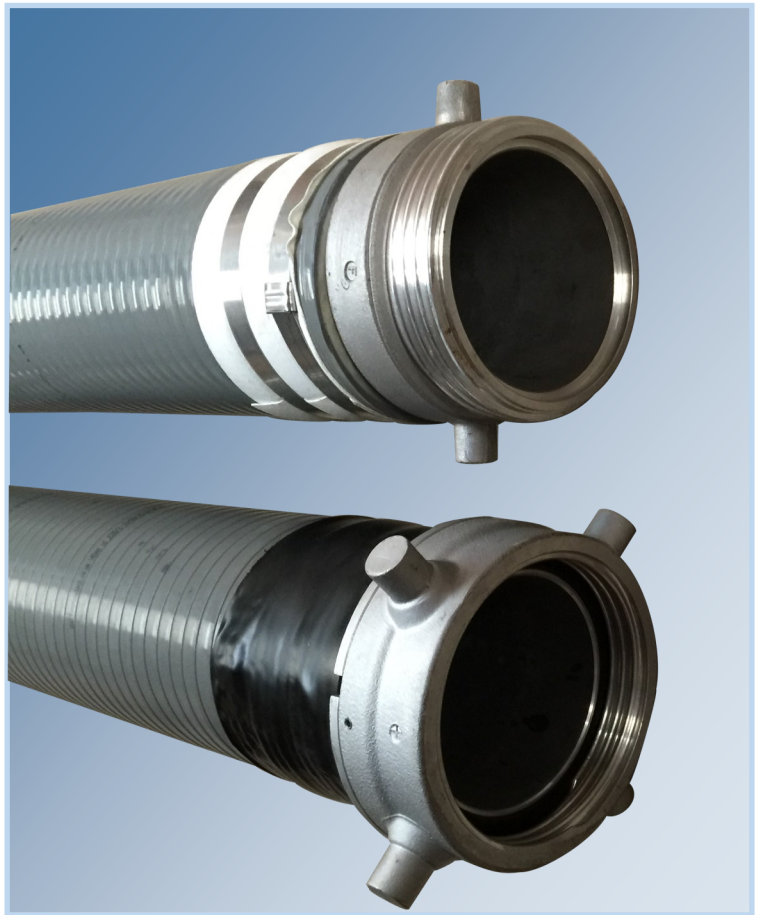

Nominal ID		Wall Thickness (mm)	Max Working Pressure (bar)		Bend Radius (mm)	Nominal Wt. uncoupled (kg/m)
Inch	mm		23°C ± 2°C	55°C ± 2°C		
3	75	6.6	5	1.6	355	2.24
4	100	8.0	4	1.3	400	3.58
5½	140	9.6	3	1	850	5.36