



#### W7519 Series


#### Rubber Hose and Cable Ramps

We supply a range of moulded, twin open-top channel hose ramps to accommodate the usual Emergency Services Fire Hose diameters up to and including 5".

A simple design that has been in use for decades, each ramp is supplied with 2 connectors to allow ramp widths to be extended quickly and easily. Spare connectors are available if required.

Each face of the ramp has 3 yellow visibility strips embedded into slots moulded into the rubber.

Maximum load for each ramp is 44 tonnes.

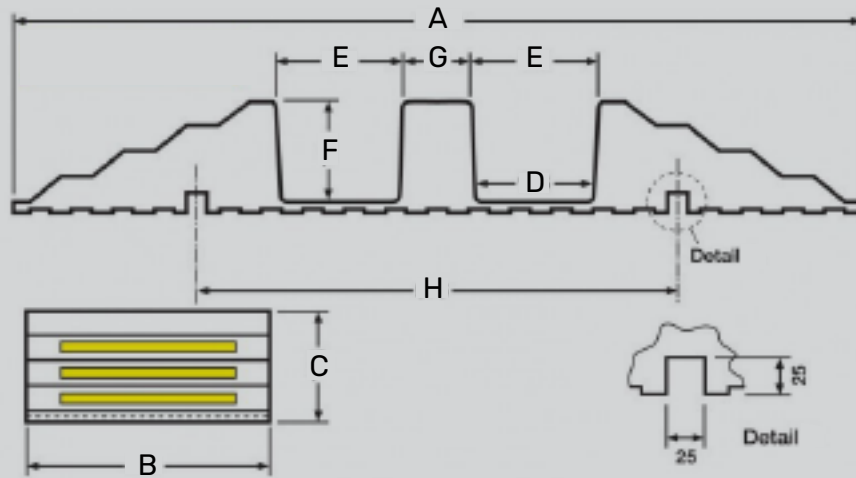

Hose Ramp Data Table*												
Part No.	Model	Length	Width	Height	Slot Base	Slot Top	Slot Depth	Spacing	Interlock Spacing	Weight (kg)	Max Load (tonnes)	Hose Dia
		A	B	C	D	E	F	G	H			
W751910	HR3	850	300	84	90	92	70	42	390	13	44	70
W751911	HR4	820	310	102	95	102	94	42	390	16	44	100
W751912	HR5	980	290	135	135	140	120	80	575	22	44	125

\* Dimensions are in shown in mm are all nominal and subject to slight variation

#### Fire Hosetech Limited,

Unit 1 Sowarth Field Industrial Estate, Settle, North Yorkshire, BD24 9AG  
 +44 (0)1729 825 999 | info@firehosetech.co.uk | www.firehosetech.co.uk