



## Dividing Breechings

### W406034 Series

### Ball-Valve Dividing Breeching

#### W406034T Series

#### "Water Thief" 3-way Ball-Valved

#### Dividing Breeching

- Inlet:** 1 x 2½" instantaneous male to BS336:2010.
- Outlets:** 1 x 2½" instantaneous female, single twist to BS336:2010.  
2 x Storz D 25 (KA31)
- Valves:** 2 x DN20 and 1 x DN32, ¼-turn ball valves with straight free - flow waterway to give very low friction loss. Stop valves in accordance with DIN 14365.

Maximum w.p. 16 bar  
Test Pressure 24 bar



Available in Light Alloy

W406034T is fitted with instantaneous connectors manufactured to BS336:2010 in Germany.

W406034TUK is fitted with instantaneous connectors manufactured to BS336:2010 in the UK.

A wide range of international connectors are available.

Approximate weight 2.9 kg

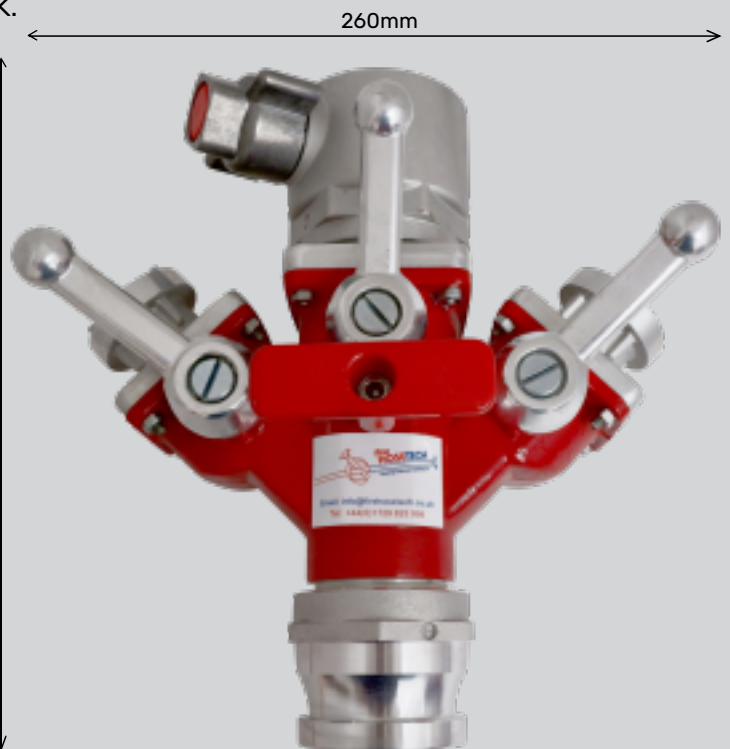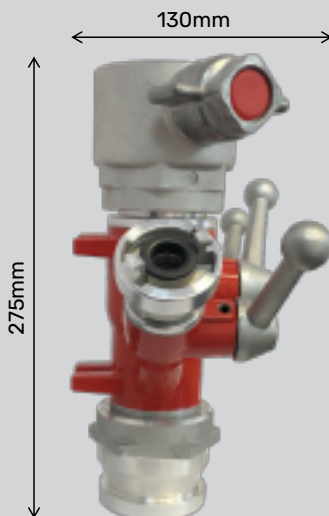

W406034TUK

#### Fire Hosetech Limited,

Unit 1 Sowarth Field Industrial Estate, Settle, North Yorkshire, BD24 9AG  
+44 (0)1729 825 999 | info@firehosetech.co.uk | www.firehosetech.co.uk