



Branches & Nozzles

W2540 Series Jet/Spray Branchpipes

W2540 Series Lightweight Jet/Spray Branchpipes

CM Type No. 1P

Simple jet/off/spray branchpipe; pipe, nozzle and tip manufactured from polyamide and fitted with a L/A inlet adaptor and ball valve.

- Inlet: 2" BSP male thread easily adapted to a wide range of international fire connections.
- Flow: 130-230 l.p.m. at 6 bar inlet pressure depending on the nozzle tip in use.
- Weight: 1.2kg (inc. B.I. coupling)
- Dims: 445x80x167mm (inc. B.I. coupling)

CM No. 1

Simple jet/off/spray branchpipe manufactured from polyamide and L/A and fitted with a L/A inlet adaptor and ball valve.


- Inlet: 2" BSP male thread easily adapted to a wide range of international fire connections.
- Flow: 130-230 l.p.m. at 6 bar inlet pressure depending on the nozzle tip in use.
- Weight: 1.5kg (inc. B.I. coupling)
- Dims: 453x80x161mm (inc. B.I. coupling)

BM No. 2

Simple jet/off/spray branchpipe manufactured from polyamide and L/A and fitted with a L/A inlet adaptor and ball valve.

- Inlet: 2" or 2½" BSP male thread easily adapted to a wide range of international fire connections.
- Flow: 400 l.p.m. at 6 bar inlet pressure.
- Weight: 2.1kg (inc. coupling)
- Dims: 514x92x169mm (inc. B.I. coupling)

For all models shown:
Maximum w.p. 16 bar
Test Pressure 24 bar

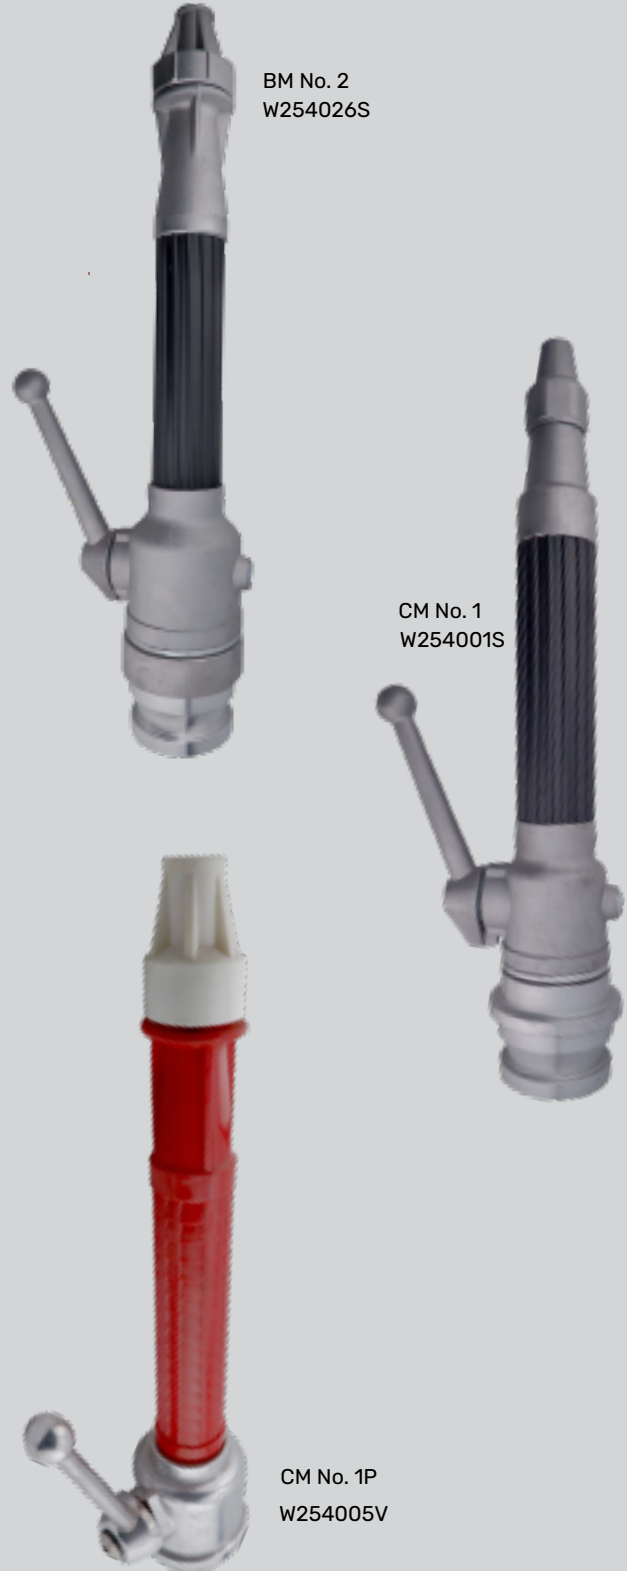

BM No. 2
W254026S

CM No. 1
W254001S

CM No. 1P
W254005V